



特點 Features \



日亞或台製 SMD LED · CRI 80 以上  
 鋁擠成型 · 陽極處理  
 抗 UV 光學擴散 PC 罩  
 LED 防水 Lens  
 逆向保護 · 過電流保護  
 支援最大輸出功率 : 30W  
 操作環境溫度 : 0°~50°C

Nichia SMD LED or LED made in Taiwan, CRI > 80  
 Extruded and Anodized Aluminum  
 UV Resisted & Optics Diffused PC cover  
 Waterproof LED Lens  
 Reverse Voltage Input & Over Current Protection  
 Support Max. Power: 30W  
 Operating temperature: 0°~50°C


配件 Accessories \

不銹鋼旋轉固定架  
 5 種 PC 罩可供選擇:  
 (透明/半霧/全霧/乳白)  
 平板型 PC 罩(透明、乳白)  
 內建電源盒

Stainless steel adjustable bracket  
 5 kinds of PC cover could be chosen:  
 (transparent/light-diffuse/heavy diffuse/ivory-white)  
 Flat shape PC cover (transparent、ivory-white)  
 LED driver available

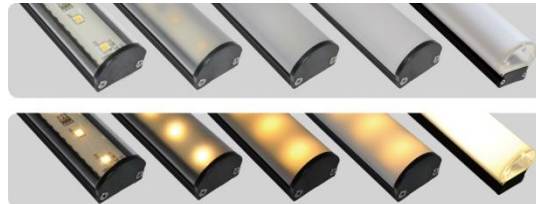

外形尺寸 Product Dimensions \

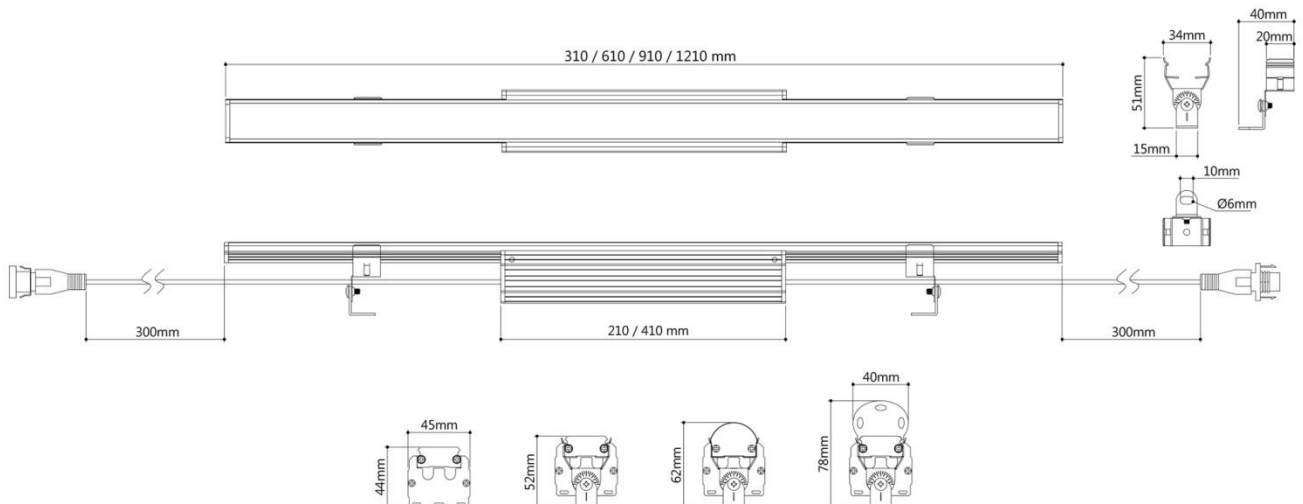

## 產品規格 Product Selection Guide - (Ta=25°C) \

### >> 無解碼規格(No Decoder)

型號 Part Code	尺寸 Size(mm)	燈數 LED Qty.	功耗 Power	光通量 Lumen	光源廠牌 LED Brand	電壓 Voltage	光效 Lumen per Watt	發光角度 Lens Degree	防護等級 Protection Grade	光色 Color
PL-V30/S12	310X45X44	12	3W	90	日亞或 台製 LED  Nichia or LED made in Taiwan	AC100~ 230V	20-50 lm/w	5° 15° 25° 45° 60° 120° 10X60° 20X30° 25X45°	IP4X or IP66 or IP68	2000K 2400K 2700K 3000K 4000K 5000K 6000K Red Green Blue Amber RGB 3in1
PL-V60/S24	610X45X44	24	6W	180						
PL-V90/S36	910X45X44	36	9W	270						
PL-V120/S48	1210X45X44	48	12W	360						
PL-V30/S18	310X45X44	18	4.5W	135						
PL-V60/S36	610X45X44	36	9W	270						
PL-V90/S54	910X45X44	54	13.5W	405						
PL-V120/S72	1210X45X44	72	18W	540						

光學數值以實際出貨為準 Optical data mainly in face.

### >> 解碼規格 (Inside Decoder)

型號 Part Code	尺寸 Size(mm)	燈數 LED Qty.	功耗 Power	控制段數 Address	光源廠牌 LED Brand	電壓 Voltage		輸入訊號 Signal	發光角度 Lens Degree	防護等級 Protection Grade	光色 Color
						DC24V	AC100~ 230V				
PL-V30-1/S12	310X45X44	12	3W	1	日亞或 台製 LED  Nichia or LED made in Taiwan	V	V	DMX512	5° 15° 25° 45° 60° 120° 10X60° 20X30° 25X45°	IP4X or IP66 or IP68	2000K 2400K 2700K 3000K 4000K 5000K 6000K Red Green Blue Amber RGB 3in1
PL-V60-1/S24	610X45X44	24	6W	1							
PL-V90-1/S36	910X45X44	36	9W	1							
PL-V120-1/S48	1210X45X44	48	12W	1							
PL-V30-2/S12	310X45X44	12	4W	1							
PL-V60-2/S24	610X45X44	24	8W	2							
PL-V90-2/S36	910X45X44	36	12W	3							
PL-V120-2/S48	1210X45X44	48	16W	4							
PL-V30-3/S12	310X45X44	12	4W	2							
PL-V60-3/S24	610X45X44	24	8W	4							
PL-V90-3/S36	910X45X44	36	12W	6							
PL-V120-3/S48	1210X45X44	48	16W	8							
PL-V30-4/S12	310X45X44	12	7W	12							
PL-V60-4/S24	610X45X44	24	13W	24							
PL-V90-4/S36	910X45X44	36	19W	36							
PL-V120-4/S48	1210X45X44	48	25W	48							
PL-V30-5/S24	310X45X44	24	7W	4							
PL-V60-5/S48	610X45X44	48	13W	8							
PL-V90-5/S72	910X45X44	72	19W	12							
PL-V120-5/S96	1210X45X44	96	25W	16							
PL-V30-6/S24	310X45X44	24	7W	2							
PL-V60-6/S48	610X45X44	48	13W	4							
PL-V90-6/S72	910X45X44	72	19W	6							
PL-V120-6/S96	1210X45X44	96	25W	8							

RGBW

P.L.G  
Professional lighting group